


This Bluetooth Receiver has been designed to be used in a phone or Aux 1 socket of Autocom Pre-2006 products (Pro-7-Sport, Active-7-Smart, etc).

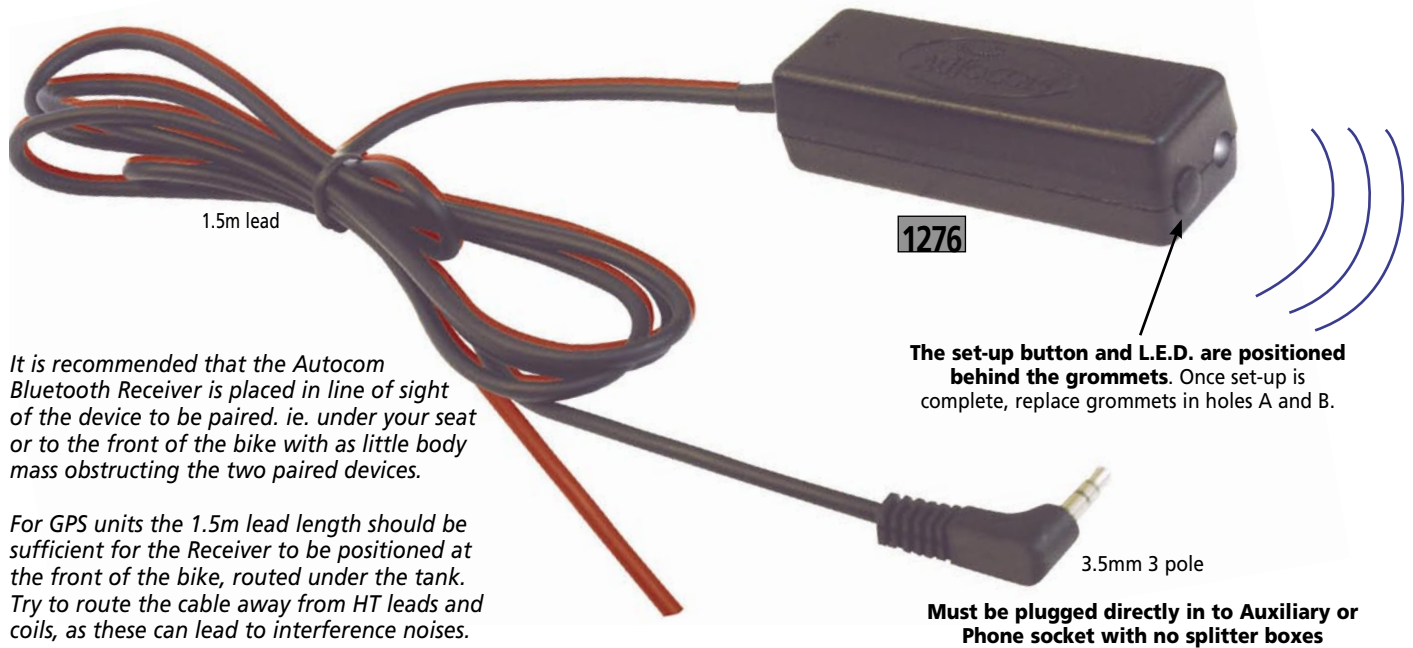

*It is recommended that the Autocom Bluetooth Receiver is placed in line of sight of the device to be paired. ie. under your seat or to the front of the bike with as little body mass obstructing the two paired devices.*

*For GPS units the 1.5m lead length should be sufficient for the Receiver to be positioned at the front of the bike, routed under the tank. Try to route the cable away from HT leads and coils, as these can lead to interference noises.*

## How to Install the Bluetooth Receiver

- The 1276 must be hardwired to the bike for power:
  - Connect positive power lead (red) to a switched circuit. NOTE: Taillight circuit in fuse box is usually the best choice.
  - NEVER connect to computer or ABS circuit and NEVER use quick connectors such as SCOTCH-LOK®

## How to Connect the Bluetooth Receiver

- Connect the 3.5mm 3-pole plug into the 3.5mm mobile phone socket (sometimes called an auxiliary or auxiliary 2 socket) on the Autocom unit. The Autocom Bluetooth Receiver, is powered by a 12 volt switched ignition supply from the motorcycle. To pick up power from this supply, locate the red power lead from the rear of the Autocom unit and remove about half an inch of the insulation. Join the red power lead from the Autocom Bluetooth Receiver to the exposed power wire of the Autocom unit and solder the joint. Once complete make sure to fully insulate the joint with self-amalgamating tape or heat shrink.
- Once you have powered up and plugged the 3.5mm plug into the Phone socket, you must wait about 10 seconds for the Autocom Bluetooth Receiver to boot up.
- To pair your mobile phone or GPS unit to the Receiver, press the button positioned in the Receiver for about 6 seconds until the light goes out. Then press the button in for a second time for about 6 seconds until the light flashes rapidly.
- Once this sequence has been completed the Autocom Bluetooth Receiver will be ready to pair to your mobile phone or GPS device. You may have to refer to the manufacturers' instructions on how to pair your phone or GPS to the Autocom Bluetooth Receiver.
- The Autocom Bluetooth Receiver will appear in your Bluetooth directory as "Autocom Dongle".
- The Autocom Bluetooth Receiver will auto power-up and auto connect on restart providing the device you want to connect to it is Bluetooth enabled.
- Once the Autocom Bluetooth Receiver is paired to your phone, it will auto answer and auto connect to most mobile phone or GPS that has Bluetooth device with headset or a hands-free profile.
- The pass key to pair your phone or GPS to the Autocom Bluetooth Receiver is 0000.

## Connection Notes

Some older cell phone, GPS or PDA firmware will not connect to the Autocom Bluetooth Receiver.  
If you are having trouble connecting to the Bluetooth Receiver, you may have to upgrade the firmware on your cell phone, GPS or PDA.

- The Autocom Bluetooth Receiver has an auto answer function built-in. Make sure your cell phone feature for "auto answer" is set to "**off**" in both headset and handsfree options.
- The TomTom Rider must be reset to factory defaults. Make sure the TomTom rider is set to "show all menus", then go to "change preferences" and on screen 7 of 7 "**reset factory settings**".
- The Garmin Zumo 550 must have the updated software version 3.0 or later.
  1. Connect Part #1314 to the stereo out jack on the Zumo 550 and connect to music socket on Autocom unit.  
For Autocom units that produce monophonic channel separation, you may connect a Part #1314 into the music socket for the improved quality performance a direct connection ensures for your music and navigation prompts.
  2. Connect the Part #1276 into the Autocom phone socket.
  3. Set headset audio to "Phone Only" in the Zumo 550's Bluetooth settings.
  4. Bluetooth your Zumo 550 to the Autocom Receiver through the "Connect Headset" in the Zumo 550's Bluetooth settings.

**Use Part #1273 Bluetooth Receiver to Bluetooth 2006 and newer  
Autocom Units** (Easi-PLUS, Active-PLUS and Super Pro AVi)



Please contact TopGear Accessories with any questions you may have online at  
[www.autocomamerica.com](http://www.autocomamerica.com) or 888-851-4327.